

2 RADAR: Grouping symptoms in the clipboard


2.1 Introduction

A new function has been implemented in RADAR to create new combined rubrics based on other rubrics in the clipboard.

2.2 How to use it

The first step consists of selecting the original symptoms (rubrics) that you would like to group (CTRL-click on the symptoms in the symptom clipboard). Creating a grouped symptom will be activated with CTRL-ENTER (ENTER by itself opens the qualification screen).

When CTRL-ENTER is pressed a small window will pop up where the user will be able to enter automatically the name of the grouped symptom. By default, the name of this grouped symptom will be the original symptom (rubric) with the largest number of remedies in it and followed by "etc". The user can accept this new symptom text or change it.

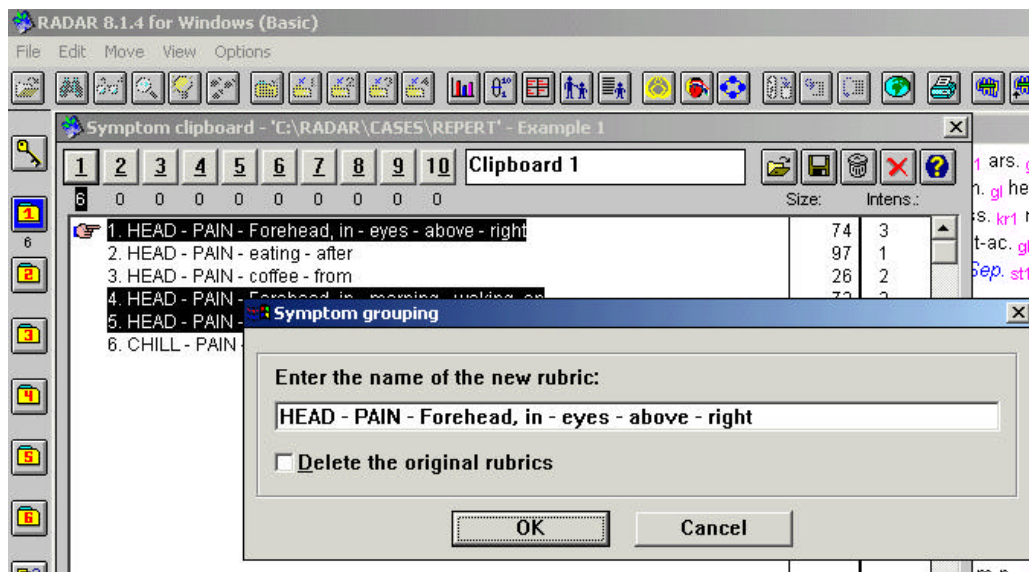

Symptom clipboard - 'C:\RADAR\CASES\REPERT' - Example 1

Clipboard 1

	Size:	Intens.:
1. HEAD - PAIN - Forehead, in - eyes - above - right	74	0
2. HEAD - PAIN - eating - after	97	1
3. HEAD - PAIN - coffee - from	26	2
4. HEAD - PAIN - Forehead, in - morning - waking, on	72	0
5. HEAD - PAIN - Forehead, in - lying - amel.	17	0
6. CHILL - PAIN - with	40	2
7. HEAD - PAIN - Forehead, in - eyes - above - right etc...	128	1

In the same window that will pop up, the user will be able to indicate his choice as it relates to the original symptoms (rubrics). He can delete them or leave them in the clipboard. If he chooses to keep the symptoms, all those symptoms will receive a 0 intensity. Even though they will still be listed in the clipboard, they will have no influence in the analysis.